

SERIES AK 30, 35 & 36

1/4 INCH DIAPHRAGM VALVE

Packless – manual and pneumatic (NC & NO)



- All metal seals to atmosphere
- Compression tube fitting, NPT and BSPT connections available
- Field repairable
- Machined from bar stock
- 316 SS construction
- Operating pressures from 125 psig (9 bar) to 3,000 psig (207 bar)
- Lock Out / Tag Out (LOTO) options
- Flow capacity 0.23 to 0.29 C_v
- Constant bleed option 5, 8 and 15 slpm of N₂ @ 80 psig (5.5 bar) refer to PN 430
- Cleaned for O₂ service
- Internal manual knob stop prevents overstressing seat
- Two step pneumatic valve option: dual operation – metered or full open
- Installation and operating instructions available at www.aptech-online.com in the Tech Briefs section

Manual valves

	PSIG / BAR	
	250 / 17	3,000 / 207
AK 3600 – Round knob, multi-turn		●
AK 3625 – Lever valve, 1/4 turn – LOTO, PL 225 optional – Lever position indicates valve status		●
AK 3650 – Round knob, 1/4 turn – Open/closed status indication window – Switch option for remote monitoring		●
AK 3652 – Round knob, 1/4 turn – Open/closed status indication window – Unique design combines scalloped round knob with raised rectangular section	●	
AK 3657 – Round knob, 1/4 turn – Pull, then turn to open – operational safety feature – Open/closed status indication window – LOTO – integral standard feature		●

Pneumatic valves, normally closed (NC)

	PSIG / BAR			
	125 / 9	145 / 10	300 / 21	3,000 / 207
AK 3000 and 3002 – Switch option for remote monitoring				●
AK 3540		●		
AK 3540VS	●			
AK 3542	●			
AK 3550 – Switch option for remote monitoring			●	
AK 3571 – Dual mode – metered or full open	●			

Pneumatic valve, normally open (NO)

	PSIG / BAR	
	250 / 17	3,000 / 207
AK 3080 – Switch option for remote monitoring		●
AK 3580 – Switch option for remote monitoring	●	

All specifications subject to change without notice.

Engineering Data — Manual valves

Operating pressure	AK 3652 AK 3600, 3625, 3650, 3657	Vacuum to 250 psig (17 bar) Vacuum to 3,000 psig (207 bar)
Flow coefficient (C _v)	AK 3600, 3625, 3650, 3652 AK 3657	0.29 (X _T = 0.6)

Engineering Data — Pneumatic valves

Operating pressure	AK 3540VS, 3542, 3571 AK 3540 AK 3580 AK 3550 AK 3000, 3002, 3080	Vacuum to 125 psig (9 bar) Vacuum to 145 psig (10 bar) Vacuum to 250 psig (17 bar) Vacuum to 300 psig (21 bar) Vacuum to 3,000 psig (207 bar)
Flow coefficient (C _v)	AK 3000, 3080 AK 3002 AK 3540, 3542, 3550, 3571, AK 3580	0.23 (X _T = 0.5) 0.28 (X _T = 0.5) 0.29 (X _T = 0.6)
Status	AK 3000, 3002, 3540, 3542 AK 3550, 3571 AK 3080, 3580	Normally closed (NC) Normally closed (NC) Normally open (NO)
Actuation pressure	AK 3000, 3002, 3540, 3550 AK 3080, 3571, 3580 AK 3542	70 to 110 psig (5 to 8 bar) 70 to 110 psig (5 to 8 bar) 60 to 110 psig (4 to 8 bar)
Actuation port	AK 3000, 3002, 3080, 3540, AK 3580 AK 3542 AK 3550, 3571	1/8 NPT, top port M5, top port M5, side port

Engineering Data — Other parameters all valves

Inlet and outlet connectors	1/4 inch compression, NPT or BSPT
Internal volume	0.06 in ³ (1.07 cm ³)
Operating temperature	-40° to +160° F (-40° to 71° C)
Proof pressure	150% of maximum rating
Burst pressure	300% of maximum rating
Leak rate	1 x 10 ⁻⁹ sccs


Engineering Data — Wetted materials all valves

Body	SS 316
Diaphragm	Ni-Co alloy / UNS R30003
Seat	PCTFE (Polyimide optional)

AK 3571 — Metered flow range tolerance at 80 psig N₂ inlet, 0 psig outlet

10 to 20 slpm	+/- 6 slpm
21 to 50 slpm	+/- 10 slpm
51 to 100 slpm	+/- 15 slpm
101 to 200 slpm	+/- 20 slpm

All specifications subject to change without notice.

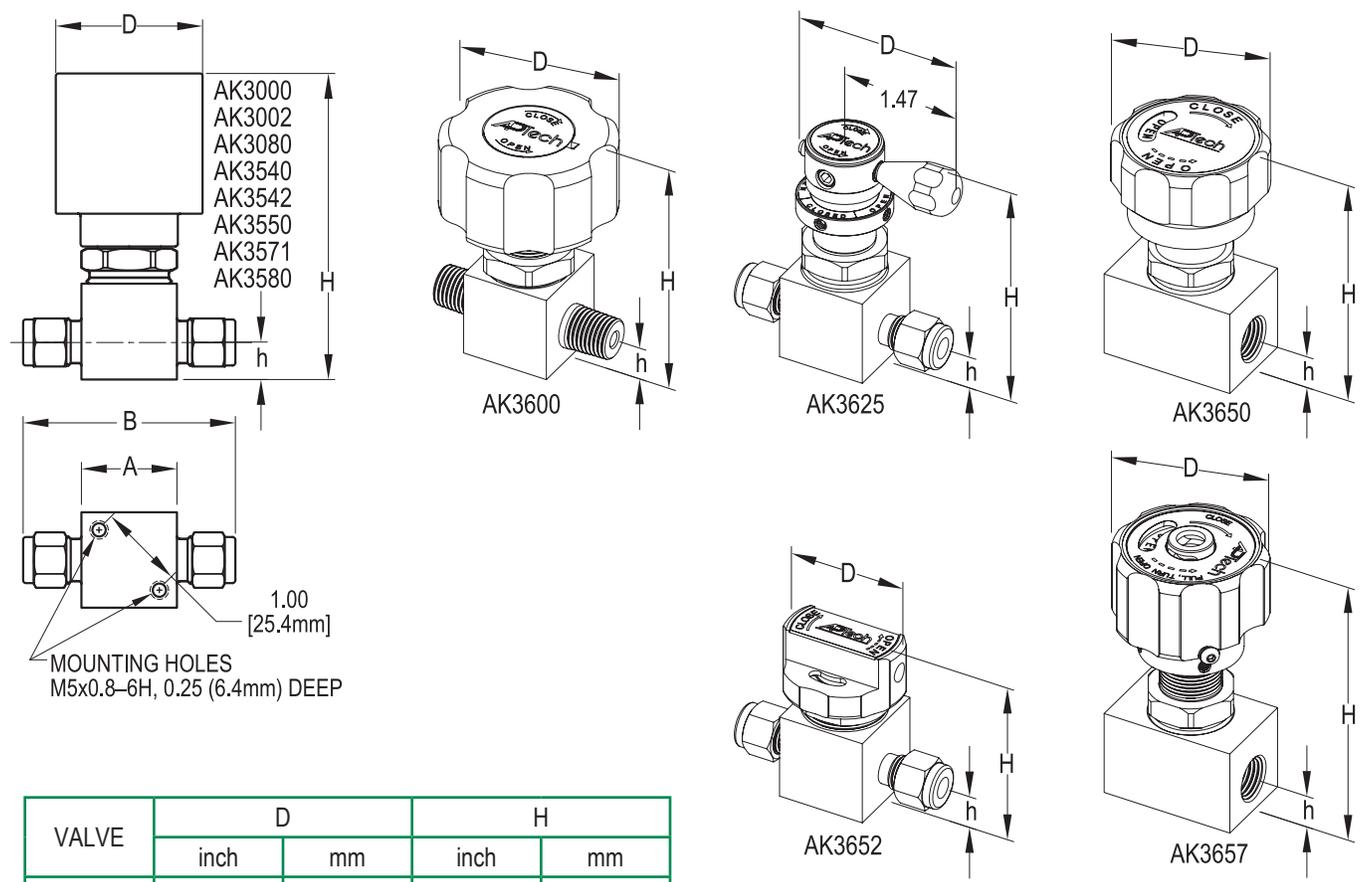

VALVE	D		H	
	inch	mm	inch	mm
AK3000	ø1.98	50.3	~4.10	104
AK3002	ø1.98	50.3	~4.10	104
AK3080	ø1.98	50.3	4.89	124
AK3540	ø1.46	37.1	~3.49	89
AK3542	ø1.57	40.0	~2.24	57
AK3550	ø1.37	34.8	~3.28	83
AK3571	ø1.72	43.7	~3.63	92
AK3580	ø1.46	37.1	~3.17	81
AK3600	ø2.12	53.8	~3.00	76
AK3625	2.04	51.8	~2.94	75
AK3650	ø1.87	47.5	~3.02	77
AK3652	ø1.50	38.1	~2.17	55
AK3657	ø1.87	47.5	~3.60	91

CONNECTION	A		B		h	
	inch	mm	inch	mm	inch	mm
4Tx4T	1.12 SQ	28.4	2.56	65.0	0.44	11.2
4Nx4N	1.12 SQ	28.4	2.32	58.9	0.44	11.2
4BRNx4BRN	1.12 SQ	28.4	2.32	58.9	0.44	11.2
4x4	N/A	N/A	1.70	43.2	0.44	11.2
4BRx4BR	N/A	N/A	1.70	43.2	0.44	11.2

All manual valves are shown in open position.
 All dimensions in inches (mm). Metric dimensions are for reference only.
 All specifications subject to change without notice.

HIGH RELIABILITY – HIGH VALUE

- Internal stop prevents over stressing seat
 - knob and lever position does not change with time
- Replaceable seat
- High leak integrity
 - all metal seals to atmosphere
- Designed and manufactured for high purity gas applications

Status indicating switch options

Pneumatic valve

- ISC: NC switch AK 3550 & 3580
- ISO: NO switch AK 3550 & 3580
- IS: switch AK 3000

Manual valve


- ISH: switch AK 3650

Please refer to the Installation and Operating Instructions for further information regarding switches.

AK 3625 handle options

Handle color options

- RD = Red
- WT = White
- BL = Blue
- GR = Green
- Black (standard)

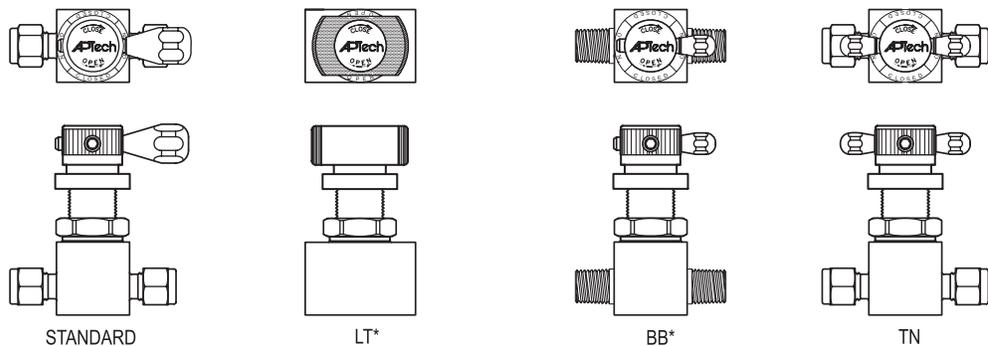

*LT and BB handle options limit valve operating pressure to 250 psig (17 bar)

CAUTION: Product selection is the sole responsibility of the user, regardless of any recommendations or suggestions made by the factory. The user shall make selections based upon their own analysis and testing with regard to function, material compatibility and product ratings. Proper installation, operation and maintenance are also required to assure safe, trouble free performance.

Sample Order Number

AK 3652S 2P 4T 4T

AK 3652 | Series

AK 3000, 3002, 3080
AK 3540, 3542, 3550
AK 3571, 3580
AK 3600, 3625
AK 3650, 3652, 3657

| Options

VS = Polyimide Seat
P = Panel mount, manual valves*
(except 3652)
ISC = NC switch 3550 & 3580
ISO = NO switch 3550 & 3580
IS = Switch 3000, 3002, 3080
ISH = Switch 3650
RD = Red 3625 lever
WT = White 3625 lever
BL = Blue 3625 lever
GR = Green 3625 lever
LT = 3625 handle option
BB = 3625 handle option
TN = 3625 handle option
MXXX** = 3571 metered adjusts flow in slpm
at 80 psig N₂

S | Material

S = Stainless steel (SS)

2P | Ports

2P = 2 ports

4T 4T | Connections
Inlet / Outlet

4 = 1/4 inch NPT female
4N = 1/4 inch NPT male
4T = 1/4 inch compression
4BR = 1/4 inch BSPT female
4BRN = 1/4 inch BSPT male

Inlet and outlet connections must be the same.

*Refer to manual for installation information.
**NOTE: Replace XXX with flow rate using 3 digits, example 50 slpm = M050.